



Factory Service Bulletin

2500 WALDEN AVENUE, BUFFALO, N.Y. 14225 (716) 681-7242
p/a WAALHAVEN Z.Z. 48, 3088 H.J. ROTTERDAM, THE NETHERLANDS

SUBJECT

ALL MOOG PRODUCTS

BULLETIN: 845

SPRING RETURN PITCH WHEEL

Kit Part Number 997-044701-002 Smoked Grey w/serrated edge
(For Memorymoog)

997-044701-001 White w/serrated edge
(For all other Moog units)

DATE:



May 9, 1984

OPTION:

This is a non-warranty customer option modification changing the pitch wheel assembly. Installation is estimated to take 1/2 hour. It provides a quick return to zero of the pitch wheel for Memorymoog, Source, Taurus II, Rogue, Minimoog, Micromoog, Multimoog and Opus synthesizers.

PROCEDURE:

Remove the existing pitch wheel assembly by removing the hardware securing the assembly to the housing. Transfer the wires from the original wheel assembly to the new one following the same wiring order and install using the original hardware. After installation, use a DVM and electrically center the new wheel to zero volts +/-100mv by loosening the set-screw inside the wheel with a 1/16" Allen driver and turning the pot shaft. Retighten the set screw and verify the wiper voltage is still zero volts.

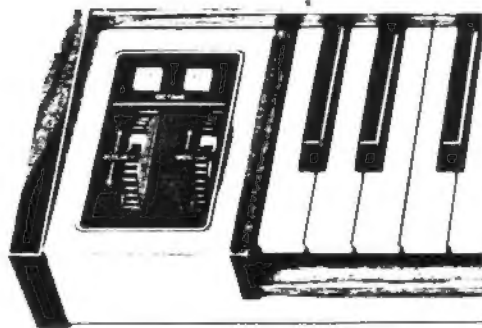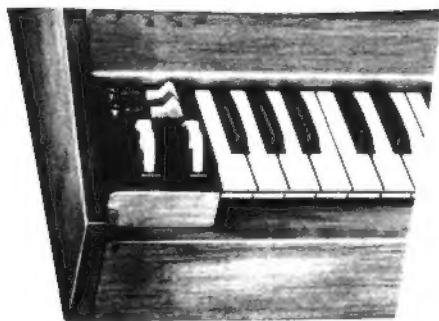

Synthesizers



Amplifiers



Sound Modifiers



Accordions



Amplifiers



Amplifiers



Amps.